

## Opće informacije

Materijal broj	98308
Tip	Ugradbeno svjetlo
Produkt segment	Unutarnja rasvjeta
Tema	ostalo/ nije dodijeljeno
Klasa energetske efikasnosti	F

## Dimenzije

Visina proizvoda (u mm/in)	42
Širina proizvoda (u mm/in)	88
Dužina proizvoda (u mm/in)	88
Dubina ugradnje (u mm/in)	50
Izrez (u mm/in)	68
Neto težina (u kg)	0,14

## Materijal & boja

Materijal kućišta	aluminij
Boja kućišta	satén nikal

## Functionality

Tip prekidača	bez prekidača
Funkcija	nije moguća zamjena LED
Baterija	Ne

## Tehnički podaci

Stupanj zaštite	IP20
Klasa zaštite	2
Mrežni napon	220-240V,50/60Hz
Napon rada	220-240V,50/60Hz
Dimabilno	Yes
Vat 1	6

## Illuminant 1

Broj grla za žarulje/izvor svjetla 1	1
Tip utičnice 1	LED
Tip žarulje 1	LED
Žarulja uklj. 1	Uključeno
Lumen svake utičnice za žarulju/izvor svjetla 1	500
Kelvin 1	4000
Boja svjetla 1	WHITE
Klasa energetske efikasnosti	F
Dimabilno	Yes
Info changeability light source/driver	LED exchangeable by a specialist, no driver included

## Kompatibilni prigušivači

Nr.31: 5TC8211-0 - SIEMENS

Nr.35: 6523 U-102 - BUSCH-JAEGER

Nr.39: 7 520 62 - LEGRAND


Nr.55: DIMAX 542 plus S 5420130 - THEBEN


Nr.60: 6523 U-102-500 - ABB

Nr.63: 820320 LEDDIM 400 - SG

Nr.67: 820323 LEDDIM200

Nr.68: 506DA126, Lauritz Knudsen

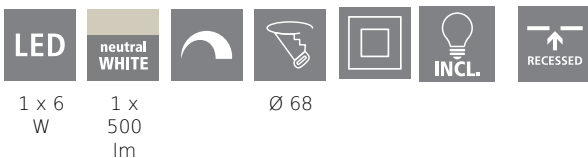

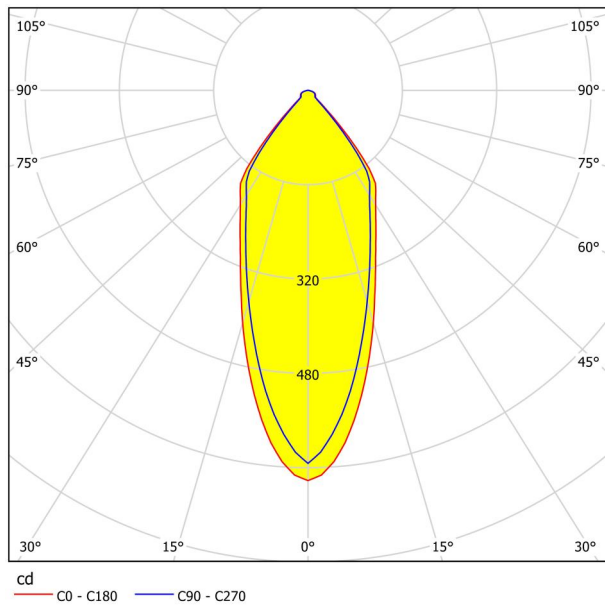

THE FUNCTIONAL GUARANTEE ONLY APPLIES TO THE USE OF THE PRODUCTS IN THE PRIVATE SECTOR AND NOT TO PRODUCTS THAT ARE USED COMMERCIALY (E.G. IN RESTAURANTS, HOTELS, RESORTS), ON A COMMUNAL LEVEL OR IN GENERAL AREAS OF MULTI-PARTY HOUSES.

