



General Information

Material number	98306
Type	recessed light
Product segment	Indoor
Theme	sonstige / nicht zuordenbar
Energy efficiency class (EEI)	F

Dimensions

Article Height (in mm/in)	42
Article Width (in mm/in)	88
Article Length (in mm/in)	88
Installation Depth (in mm/in)	50
Cutout (in mm/in)	68
Net Weight (in kg)	0.13

Material & Colour

Enclosure Material	aluminium
Enclosure Colour	white

Functionality

Switch Type	without switch
Function	LED not replaceable
Battery	No

Technical Information

Protection Degree	IP20
Protection Class	2
Mains Voltage	220-240V,50/60Hz
Operation Voltage	220-240V,50/60Hz
Dimmable	Yes
Watt 1	6

Illuminant 1

Number of Lamp socket / Light source 1	1
Lamp socket 1	LED
Illuminant type 1	LED
Illuminant 1	Inclusive
Lumen each Lamp socket / Light source 1	500
Kelvin 1	4000
Light colour 1	WHITE
Energy efficiency class (EEI)	F
Dimmable	Yes
Info changeability□light source/driver	LED exchangeable by a specialist, no driver included

Compatible Dimmers

Nr.31: 5TC8211-0 - SIEMENS

Nr.35: 6523 U-102 - BUSCH-JAEGER

Nr.39: 7 520 62 - LEGRAND


Nr.55: DIMAX 542 plus S 5420130 - THEBEN

Nr.60: 6523 U-102-500 - ABB


Nr.63: 820320 LEDDIM 400 - SG

Nr.67: 820323 LEDDIM200

Nr.68: 506DA126, Lauritz Knudsen

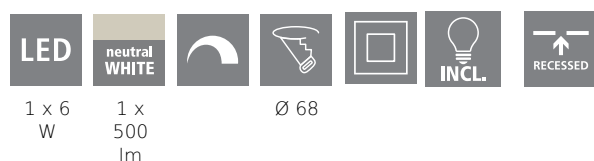

98306 SALICETO

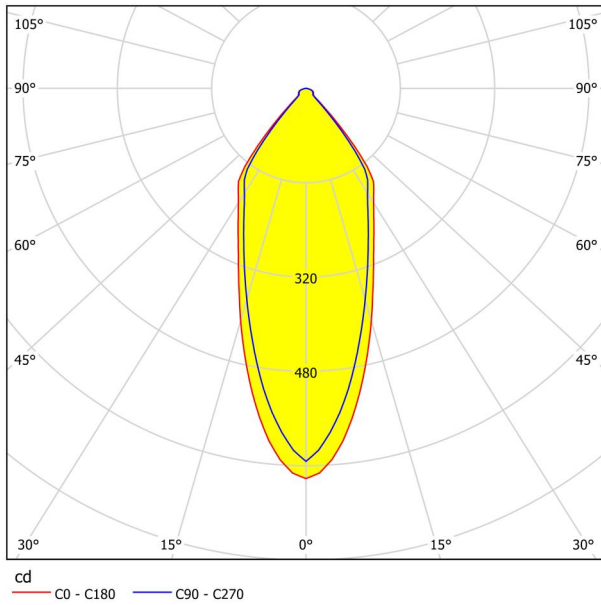

THE FUNCTIONAL GUARANTEE ONLY APPLIES TO THE USE OF THE PRODUCTS IN THE PRIVATE SECTOR AND NOT TO PRODUCTS THAT ARE USED COMMERCIALY (E.G. IN RESTAURANTS, HOTELS, RESORTS), ON A COMMUNAL LEVEL OR IN GENERAL AREAS OF MULTI-PARTY HOUSES.

